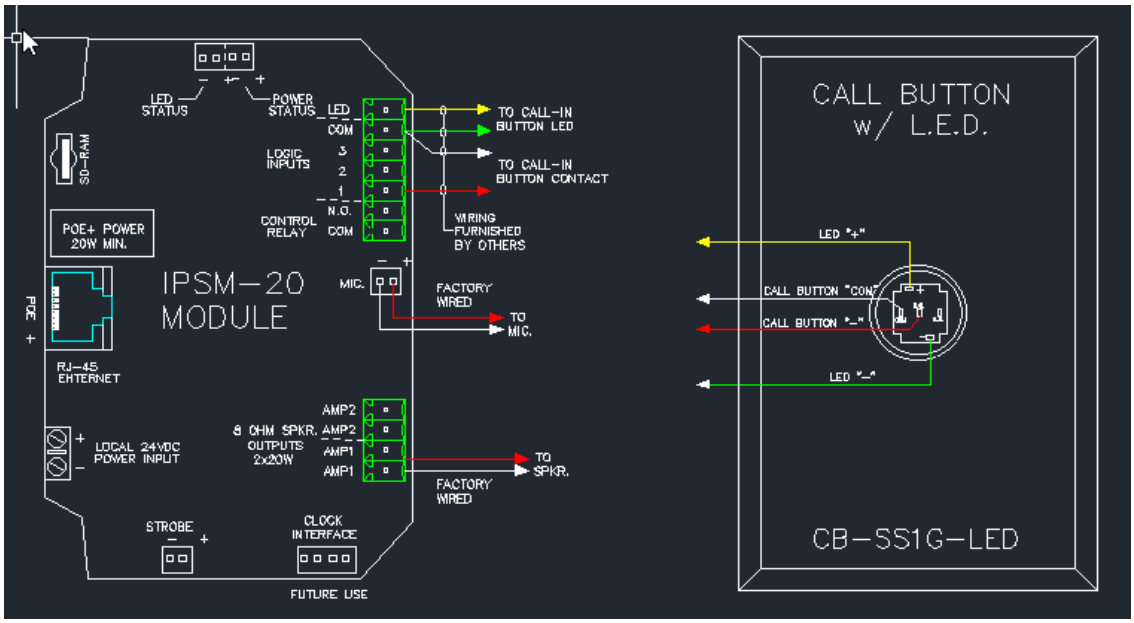
LED STATUS
POWER STATUS
SD-RAM
LED
COM
LOGIC INPUTS
3
2
1
N.O.
CONTROL RELAY
COM
TO CALL-IN BUTTON LED
TO CALL-IN BUTTON CONTACT
WIRING FURNISHED BY OTHERS
POE+ POWER 20W MIN.
IPSM-20 MODULE
MIC.
FACTORY WIRED
TO MIC.
POE +
RJ-45 ETHERNET
AMP2
8 OHM SPKR. OUTPUTS 2x20W
AMP2
AMP1
AMP1
TO SPKR.
FACTORY WIRED
LOCAL 24VDC POWER INPUT
STROBE
CLOCK INTERFACE
FUTURE USE
CALL BUTTON w/ L.E.D.
LED "+"
CALL BUTTON "COM"
CALL BUTTON "-"
LED "-"
CB-SS1G-LED