

CAD20T CAD10T

Indoor/Outdoor 5" Cone Sound Projectors



■ FEATURES

- Frequency Response Tailored for Music or Speech
- Weather-Sealed ABS Housing with Molded-in UV Inhibitor
- Polypropylene Twin-Cone for Excellent Dispersion
- Stainless Steel Hardware
- High protection against Vandalism

■ DESCRIPTION

Penton Audio models CAD20T and CAD10T are twin-cone, all-weather, full-range music projectors designed for long-term reliability and even coverage in constant-voltage, distributed audio systems.

The handsome, molded ABS housing is protected from elements with a UV inhibitor and sealed from the rear with a silicone rubber-like gasket, a gland nut and stainless steel hardware.

The CAD Series uses a 5-1/4" polypropylene cone that not only has moisture-resistant qualities, but enhanced low frequencies as well.

Visually identical, they are finished in non-reflecting white with matching aluminum U brackets. (CAD20T-B is non-reflecting black.) Colors may be customized with epoxy paint. High protection against Vandalism

■ APPLICATION

Versatile in application, the CAD series may be used for surface applications indoors or out and for value-engineered projects without sacrificing audio quality. The durability of the molded ABS housing is well suited for moist outdoor environment, the robust construction ensures high protection against vandalism and makes it suitable for use in shopping centers, railway stations, etc.

Mainly considered for music installations, the CAD Series is equally effective for voice reproduction in commercial, industrial, and institutional settings.

Applications include mounting in atriums, malls, banks, upscale stores and outdoor restaurants. Additionally, they can be used for traditional paging situations where the customer demands quality background music.



■ SPECIFICATIONS

- **CONE SPEAKER SIZE:**
5-1/4" (134 mm)

- **FREQUENCY RESPONSE (SEE FIG 1)**
CAD20T: 160-20,000 Hz \pm 6 dB
CAD10T: 180-20,000 Hz \pm 6 dB

- **LOW FREQUENCY -3dB DOWN POINT:**
CAD20T: 165 Hz
CAD10T: 190 Hz

- **POWER HANDLING**
CAD20T: 28 Watts
CAD10T: 15 Watts

- **SPL @ 1w 1m**
CAD20T: 92 dB
CAD10T: 93 dB

- **SPL @ FULL POWER, 1m**
CAD20T: 105 dB
CAD10T: 103 dB

- **DISPERSION @ 2 kHz (6 dB Down):**
110°

- **DIRECTIVITY Q FACTOR @ 2 kHz:**
5.5

- **CONE DESIGN:**
Twin Cone

- **CONE MATERIAL:**
Polypropylene

- **MAGNET WEIGHT:**
CAD20T: 10 oz
CAD10T: 5.34 oz

- **CONNECTION**
CAD20T-B: Terminal Block
CAD20T: Via Wire Nuts or Terminals
CAD10T: Via Wire Nuts or Terminals

- **TRANSFORMER MAX INSERTION LOSS:**
0.6 dB

- **70.7-VOLT TRANSFORMER TAPS (WATTS)**

	CAD20T	CAD10T
Red	20	10
Blue	10	5
Orange	5	2.5
Yellow	2.5	1.25
Black	Common	Common

- **70.7-VOLT TRANSFORMER IMPEDANCE**

	CAD20T	CAD10T
Red	250	500
Blue	500	1 K
Orange	1 K	2 K
Yellow	2 K	4 K

- **SUPPLIED MOUNTING ACCESSORIES:**
Stainless Steel Bracket Bolts

- **HOUSING MATERIAL:**
Molded ABS with UV Inhibitors

- **MOUNTING:**
Non-reflective White "U" Bracket

- **APPROVALS:**
CE

- **FINISH:**
CAD20T: Non-reflective White
CAD20T-B: Non-reflective Black
CAD10T: Non-reflective White

- **DIMENSIONS, INCH (MM) W/O BRACKET:**
5.52 x 8.62 (w/gland nut)
(138 x 219)

- **NET WEIGHT LBS (KGS):**
CAD20T: 4.18 (1.90)
CAD10T: 3.42 (1.55)

CAD20T

CAD10T

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS:

Unit shall be Penton Audio USA Model (CAD20T/CAD10T) or approved equal. Assembly shall be comprised of a 5-1/4" twin-cone loudspeaker, internal 70.7-volt transformer with an insertion loss of less than 0.6 dB. Housing shall be molded ABS weather-sealed, protected with UV inhibitor. Cable shall gain entry through a gland nut in housing back. Unit shall have stainless steel hardware and a metal "U" mounting bracket.

CAD20T loudspeaker shall have a polypropylene twin cone; be rated at 20-watts output; 92 dB at 1 watt, 1 meter; have a 110° dispersion and a smooth extended response over a range of 160-20,000 Hz. Transformer shall have 20, 10, 5 and 2.5-watt power taps. Finish shall be non-reflective white (W) or black (B).

CAD10T loudspeaker shall be rated at 10 watts; 93 dB at 1 watt, 1 meter; have 110° dispersion and a smooth extended response over a range of 180-20,000 Hz. Transformer shall have 10, 5, 2.5 and 1.25-watt power taps. Finish shall be non-reflective white.

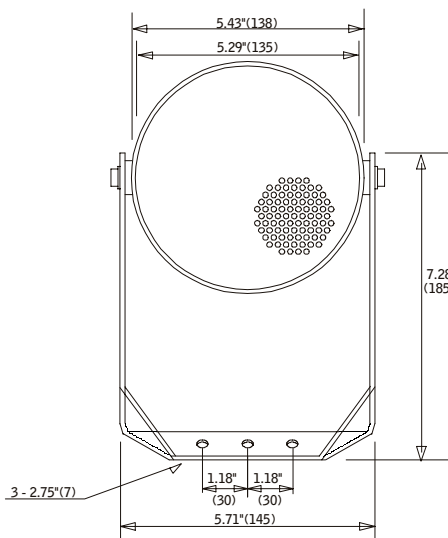
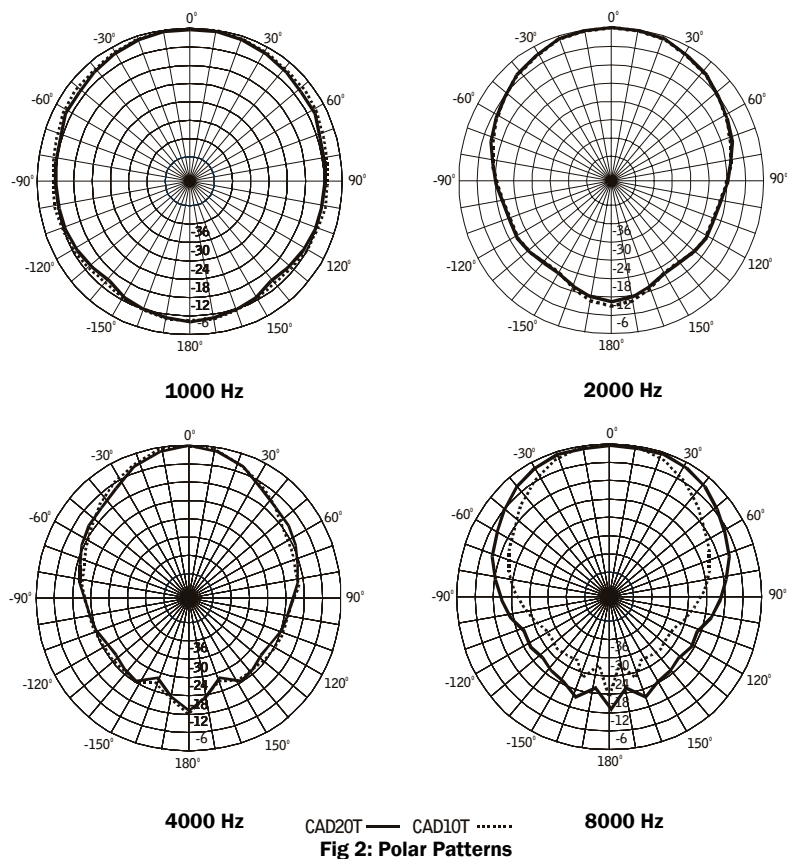
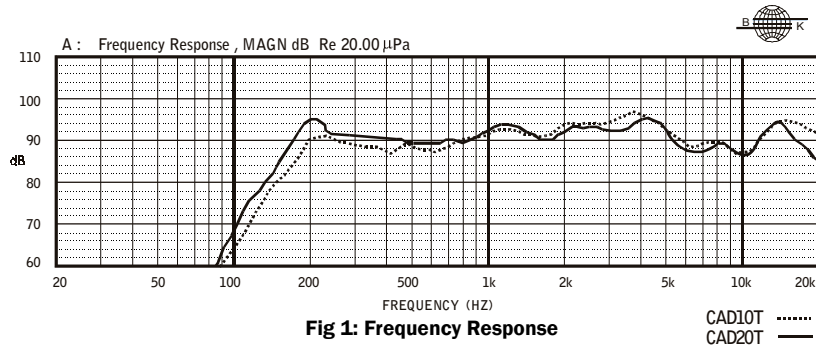


Fig 3: Front View

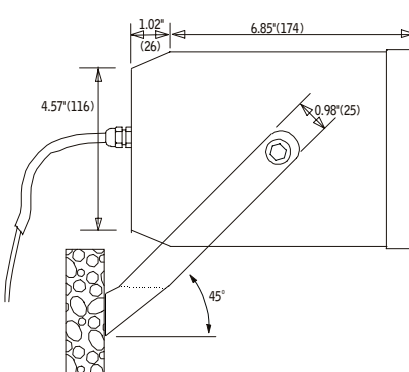


Fig 4: Side View




Fig 5: Circuit Diagram

Penton Audio USA - a subsidiary of Penton Media Technologies

406 Lincoln St., Marlborough, MA 01752

Phone: (888) 883-8383

Fax: (888) 821-2121

Website: www.penton-usa.com



© 2002 Penton Audio USA

Specifications subject to change without notice

SS02-4011